


KSD : Foot Valve

Foot Valve



Ordering Code

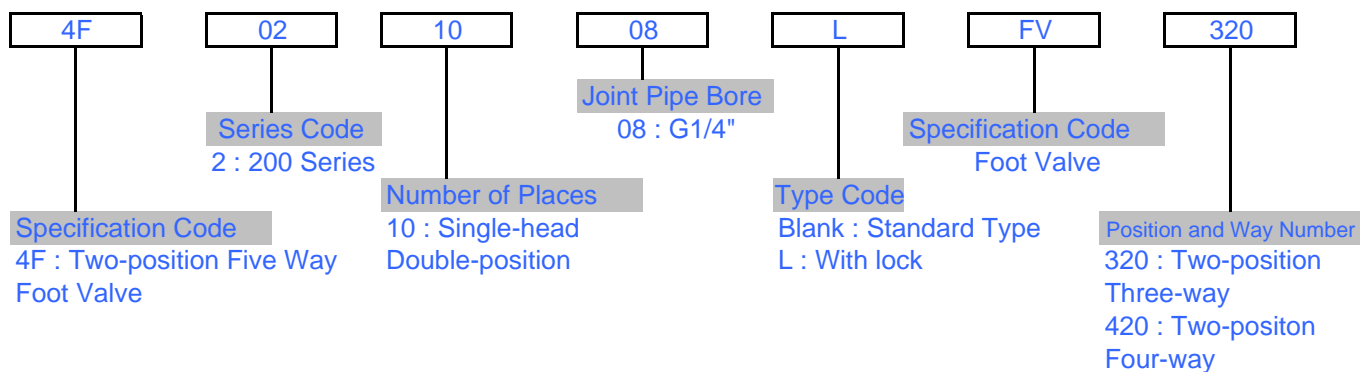

Specification

Model	4F210-08	4F210-08L	FV420	FV320
Working Medium	40 Micron Filtered Air			
Position and Way Number	Two-position Five-Way		Two-position Four-way	Two-position Three-way
Joint Pipe Bore	Air Inlet = Air Outlet = Exhaust = G1/4"		Air Inlet = Air Outlet = G1/4" / Exhaust = G1/8"	
Motion Pattern	Direct Drive Type			
Working - Pressure Range	0~0.8 Mpa			
Operating Temperature Range	0~60 C			