


KSD : Hand Draw Valve

Hand - Draw Valve



Ordering Code

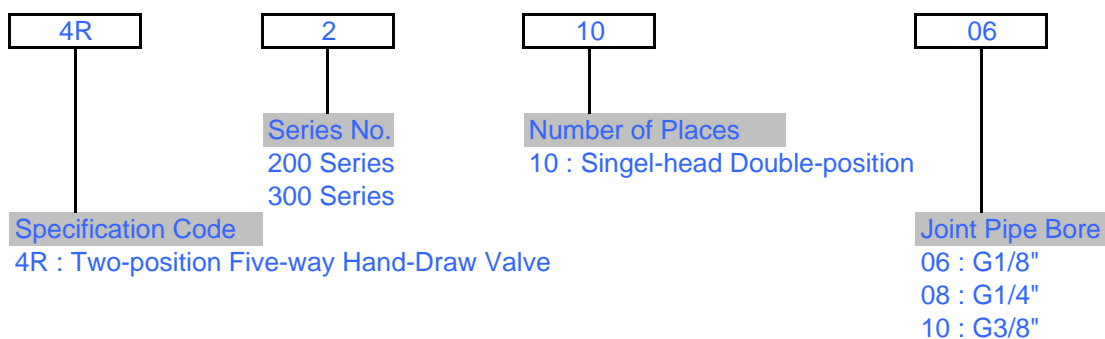

Specification

Model	4R210-06	4R210-08	3R210-06	3R210-08	4R310-08	4R310-10	3R310-08	3R310-10
Workign Medium	40 Micron Filtered Air							
Joint Pipe Bore	Air Inlet = Air Outlet = Exhaust = G1/8"	Air Inlet = Air Outlet = 1/4" and Exhaust = G1/8"	Air Inlet = Air Outlet = Exhaust = G1/8"	Air Inlet = Air Outlet = Exhaust = G1/4"	Air Inlet = Air Outlet = Exhaust = G1/4"	Air Inlet = Air Outlet = Exhaust = G1/4"	Air Inlet = Air Outlet = Exhaust = G1/4"	Air Inlet = Air Outlet = Exhaust = G3/8"
Effective Sectional Area	14mm ² (CV=0.78)	16mm ² (CV=0.89)	14mm ² (CV=0.78)	16mm ² (CV=0.89)	25mm ² (CV=1.40)	30mm ² (CV=1.68)	25mm ² (CV=1.40)	30mm ² (CV=1.68)
Workign - pressure Range	0~0.8 Mpa							
Operating Temperature Range	0~60 C							
Position and Way Number	Two-position Five-way		Two-position Three-way		Two-position Five-way		Two-position Three-way	