


KSD : Hand Pull Valve

Hand - pull Valve



Ordering Code

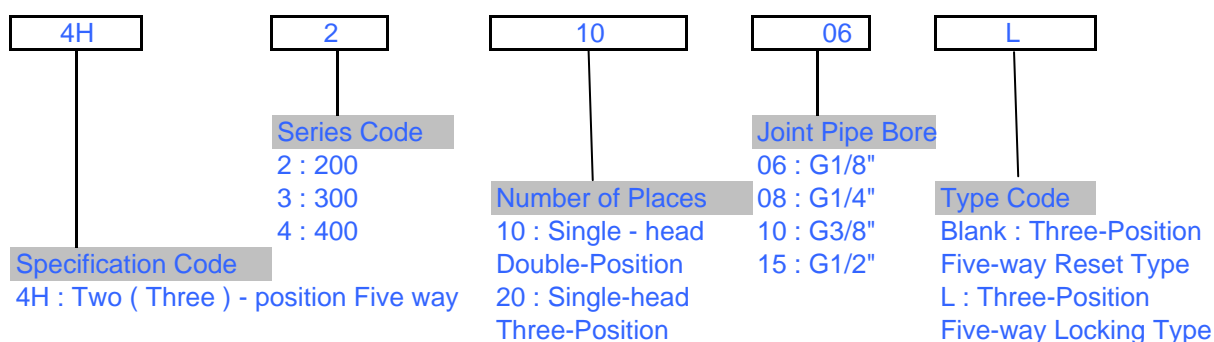

Specification

| Model | 4H210-06 | 4H210-8 | 4H230-08 | 4H310-08 | 4H310-10 | 4H330-10 | 4H410-15 | 4H430-15 |
|-----------------------------|--------------------------------|---|--------------------------------|-------------------------------|--|--------------------------------|--------------------------------|--------------------------------|
| Working Medium | 40 Micron Filtered Air | | | | | | | |
| Motion Pattern | Direct Drive Type | | | | | | | |
| Effective Section Area | 14mm ² (CV=0.78) | 16mm ² (CV=0.89) | 12mm ² (CV=0.67) | 25mm ² (CV=1.4) | 30mm ² (CV=1.68) | 18mm ² (CV=1.00) | 50mm ² (CV=2.79) | 30mm ² (CV=1.68) |
| Joint Pipe Bore | G 1/8" | Air Inlet = Air , Outlet = G1/4" Exhaust = G1/8" | | G 1/4" | Air Inlet = Air , Outlet = = G3/8" Exhaust = G1/4" | | G 1/2" | |
| Working-Pressure Range | 0~0.8 Mpa | | | | | | | |
| Operating Temperature Range | 0~60 C | | | | | | | |