


KSD : Hand Pull Valve

Hand - pull Valve



Ordering Code

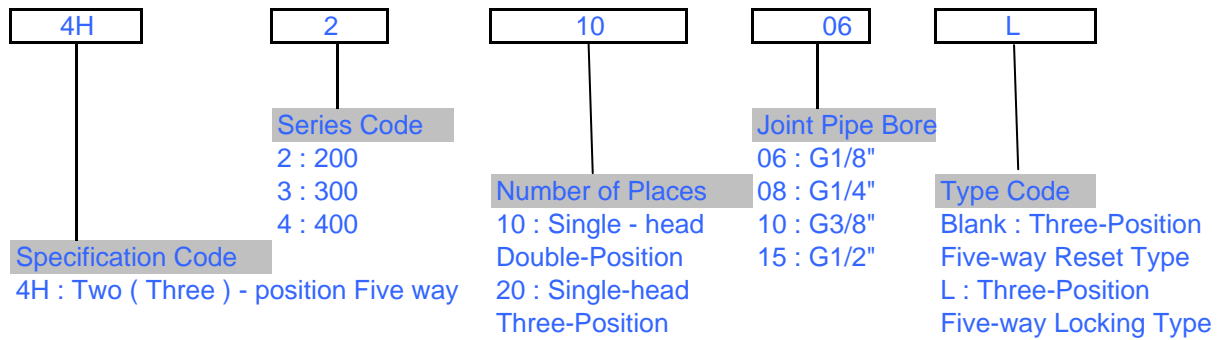

Specification

Model	4H210-06	4H210-8	4H230-08	4H310-08	4H310-10	4H330-10	4H410-15	4H430-15
Working Medium	40 Micron Filtered Air							
Motion Pattern	Direct Drive Type							
Effective Section Area	14mm ² (CV=0.78)	16mm ² (CV=0.89)	12mm ² (CV=0.67)	25mm ² (CV=1.4)	30mm ² (CV=1.68)	18mm ² (CV=1.00)	50mm ² (CV=2.79)	30mm ² (CV=1.68)
Joint Pipe Bore	G 1/8"	Air Inlet = Air , Outlet = G1/4" Exhaust = G1/8"		G 1/4"	Air Inlet = Air , Outlet = = G3/8" Exhaust = G1/4"		G 1/2"	
Working-Pressure Range	0~0.8 Mpa							
Operating Temperature Range	0~60 C							