


# KSD : Shuttle Valve


## Shuttle Valve



## Ordering Code

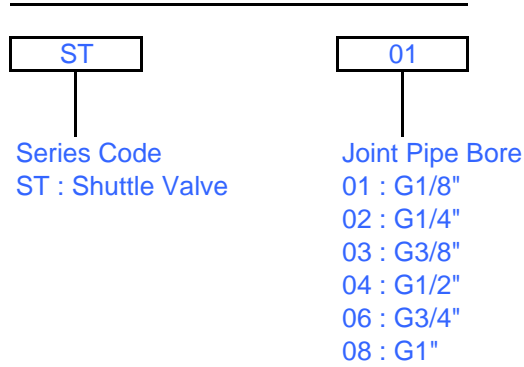

## Graphic Symbol

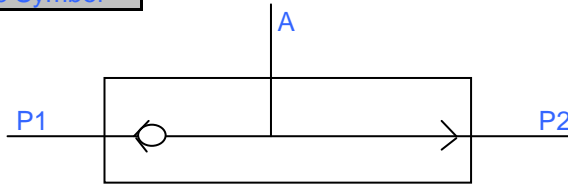

## Specification

Symbol / Mode	ST-01	ST-02	ST-03	ST-04	ST-06	ST-08
Joint Pipe Bore	G1/8"	G1/4"	G3/8"	G1/2"	G3/4"	G1"
Effective Section Area	7.5 MM <sup>2</sup>	21 MM <sup>2</sup>	40 MM <sup>2</sup>	60 MM <sup>2</sup>	110 MM <sup>2</sup>	190 MM <sup>2</sup>
Working -Pressure Range	0~1.0Mpa					
Working Medium	Air					
Operating Temperature Range	0~60C					

## Dimension Sheet

Symbol /Mode	A	B	C	D	E	F	G
ST-01	40	24	16	4.5	25	21	G1/8"
ST-02	50	35	22	5.5	35	25	G1/4"
ST-03	75	48	30	7	50	42	G3/8"
ST-04	75	48	30	7	50	42	G1/2"
ST-06	110	72	40	7	70	58	G3/4"
ST-08	110	72	40	7	70	58	G1"

## Overall Dimension

Type : ST Series

### TYPE:ST系列/Series

