


Heavy 64 Series - ADJUSTABLESHOCK ABSORBERS

ATTENTIONS OF SETTING UP

- Put the dasher and let its direction right to the axes, please. Meanwhile, make the direction of motion and the axes consistent.
- Don't unlade the front cap when using. It will break its bottom in that case.
- Do not spray paint at the solenoglyphic tooth and axes, please. It will affect heat radiation and oil leak perhaps.
- Do not use when piston rod is not clean, please.
- Be sure they are synchronizing when double shock absorber were installed in the same side, please.
- Do not decompose using, maintaining its security.


HOW TO ORDER

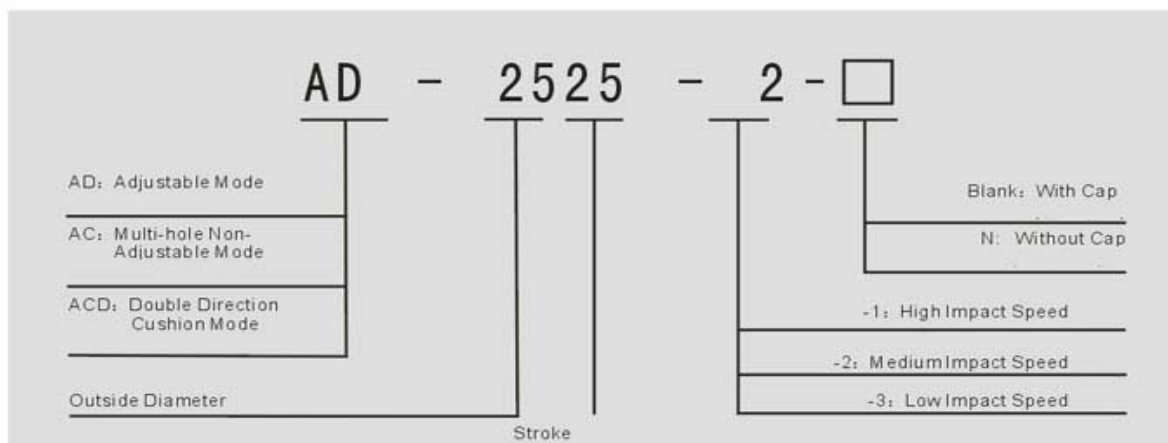

STOP COLLARS

Enacting effective travel and orientation

EXAMPLE OF APPLICATION

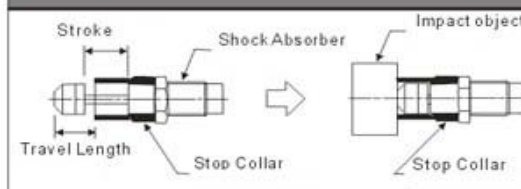

Specification	Dimensions	Applicable for shock Absorber Model
SC 08	M8X1.0 	*AC-0806
SC 10	M10X1.0 	*AC-1005 *AC-1007 *AC-1008
SC 12	M12X1.0 	*AC-1210
SC 14	M14X1.5 	*AC-1412 *AD-1410 *AC-1415 *AD-1415 *AC-1416 *AC-1420

Specification	Dimensions	Applicable for shock Absorber Model
SC 20	M20X1.5 	*AC-2015 *AD2016 *AC-2020 *AD-2025 *AC-2030 *AC-2050 *ACD-2030
SC 25	M25X1.5 	*AC-2525 *AD-2525 *AC-2550 *AD-2530 *AC-2580 *AD-2550 *AD-2580
SC 40	M25X1.5 	*AC-2540 *AD-2540
SC 50	M36X1.5 	*AC-3660 *AD-3625 *AD-3650