


TADA : AR / AW (SMC Style)

AR Series Regulator AR1000~5000

AW Series Filter & Regulator AW1000~5000 Series




Ordering Code

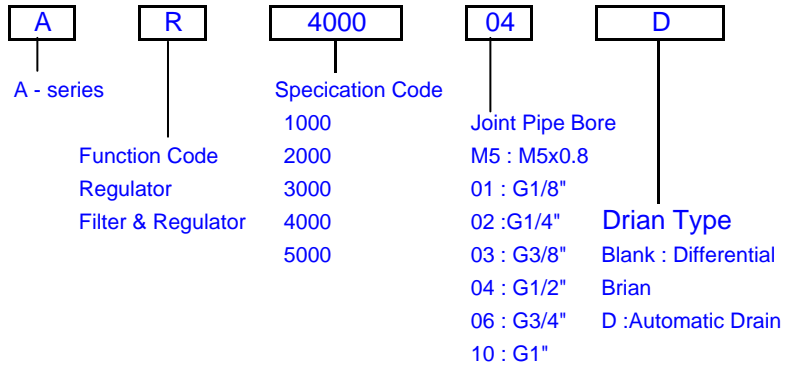


Graphic Symbol

AR



AW



Specification

Model	AR2000-01	AR2000-02	AR3000-02	AR3000-03	AR4000-03	AR4000-04	AR4000-06	AR5000-06	AR5000-10
	AW2000-01	AW2000-02	AW3000-02	AW3000-03	AW4000-03	AW4000-04	AW4000-06	AW5000-06	AW5000-10
AR Rated Flow	550	550	2500	2500	6000	6000	6000	8000	8000
AW Rated Flow	550	550	2000	2000	4000	4000	4500	5500	5500
Joint Pipe Bore	1/8	1/4	1/4	3/8	3/8	1/2	3/4	3/4	1
Joint Pipe Bore	1/8	1/4	1/4	3/8	3/8	1/2	3/4	3/4	1
Highest Working Pressure	1.0 Mpa								
Ensured Pressure Resistance	1.5 Mpa								
Operating Temperature Range	5 ~ 60 C								
Range of Adjustable Pressure	0.05 ~ 0.85 Mpa								
Container Material	Polycarbonate								
Protective Cover	Not Available			Available					
Valve Type	with Overflow								
AW Drain Function	Differential Drain			Differential Drain Automatic Drain					