


TADA : F.R.L Combination (SMC Style)

Air Filter Combination


(F.R.L Combination) (FR.L Combination) AC2000~5000 Series , AC2010~5010 Series



Ordering Code

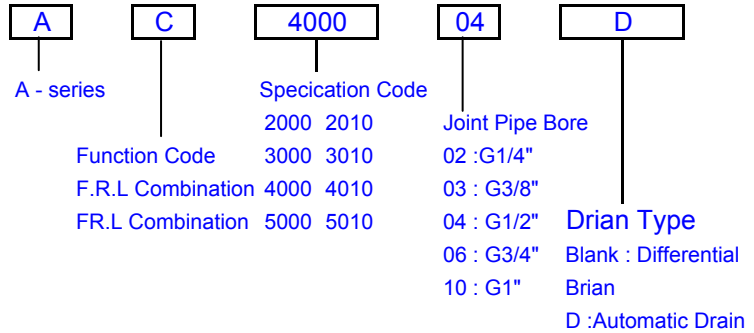

Graphic Symbol



Specification

Model	AC2010-02	AC2000-02	AC3010-03	AC3000-03	AC4010-04	AC4000-04	AC5010-06	AC5000-06	AC5000-10
Rated Flow	500	500	1700	2000	3000	4000	4000	5000	5000
Joint Pipe Bore	1/4	1/4	3/8	3/8	1/2	1/2	3/4	3/4	1
Filter Precision	25µm								
Highest Working Pressure	1.0 Mpa								
Ensured Pressure	1.5 Mpa								
Operating Temperature	5~60 C								
Range of Adjustable	0.05 ~ 0.85 Mpa								
Recommended Oil Use	ISO VG32								
Container Material	Polycarbonate								
Protective Cover	Not Available		Available						
Drain Function	Differential Drain		Differential Drain , Automatic Drain						
Valve Type	With Overflow								
Assembly	Filter	AF2000-02	AF3000-03	AF4000-04	AF5000-06	AF5000-10			
	Regulator	AR2000-02	AR3000-03	AR4000-04	AR5000-06	AR5000-10			
	Lubricator	AL2000-02	AL3000-03	AL4000-04	AL5000-06	AL5000-10			
	Filter the pressure regulator	AW2000-02	AW3000-03	AW4000-04	AW5000-06				